



STWC

■ S..-STWCR/L... Steel shank

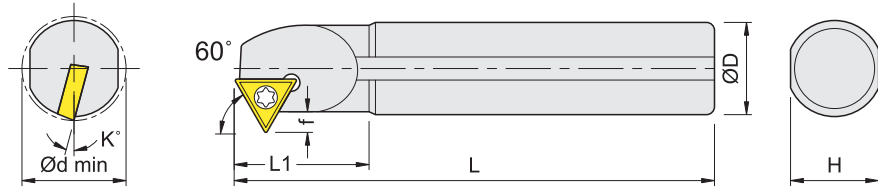

Right-hand shown

■ A..-STWCR/L... Steel shank+coolant hole

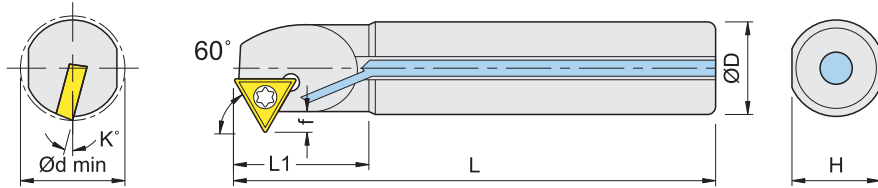

Right-hand shown

Item Code	Dimensions, mm							Insert	Screw 	Wrench
	D	L	L1	f	H	K	dmin			
IS08K-STWCR/L-09	8	125	23	2	7	15	11	TC..0902..	MS2205A	TF7
IS10K-STWCR/L-11	10	125	23	2.5	9	15	13	TC..1102..	MS2506A	TF9
IS12M-STWCR/L-11	12	150	30	2.5	11	13	16			
IS16Q-STWCR/L-11	16	180	30	2.5	15	10	20			
IS20R-STWCR/L-11	20	200	40	2.5	18	7	25			
IS20R-STWCR/L-16	20	200	40	4.5	18	8	26			
IS25R-STWCR/L-16	25	200	45	4.5	23	6	30	TC..16T3..	MS4011A	TF15
IS32S-STWCR/L-16	32	250	45	4.5	30	4	40			
IA10K-STWCR/L-11	10	125	23	2.5	9	15	13			
IA12M-STWCR/L-11	12	150	30	2.5	11	13	16			
IA16Q-STWCR/L-11	16	180	30	2.5	15	10	20			
IA20R-STWCR/L-11	20	200	40	2.5	18	7	25			
IA20R-STWCR/L-16	20	200	40	4.5	18	8	26	TC..16T3..	MS4011A	TF15
IA25R-STWCR/L-16	25	200	45	4.5	23	6	30			
IA32S-STWCR/L-16	32	250	45	4.5	30	4	40			